



NH00gG 500V/690V 10A-160A

Class of Operation:gG

保护特性: gG




Standard/ 标准: IEC 60269, GB 13539

INTERRUPTING CAPACITY/ 分断能力:

120,000 A at 500V AC(10A-160A)
80,000 A at 690V AC(10A-100A)

Dimensions/ 尺寸:

Unit: mm

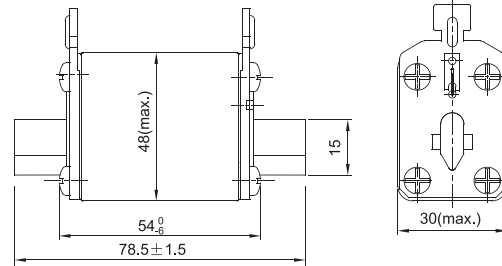

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证	
		CCC	
00gG10U5/U6	10A	●	●
00gG12U5/U6	12A	●	●
00gG16U5/U6	16A	●	●
00gG20U5/U6	20A	●	●
00gG25U5/U6	25A	●	●
00gG32U5/U6	32A	●	●
00gG35U5/U6	35A	●	●
00gG40U5/U6	40A	●	●
00gG50U5/U6	50A	●	●
00gG63U5/U6	63A	●	●
00gG80U5/U6	80A	●	●
00gG100U5/U6	100A	●	●
00gG125U5	125A	●	●
00gG160U5	160A	●	●

U5 DENOTES FOR 500V AC
U6 DENOTES FOR 690V AC
● DENOTES FOR APPROVAL
○ DENOTES FOR PENDING

U5 表示 500V AC
U6 表示 690V AC
● 表示已取得安全认证
○ 表示正在申请安全认证

ELECTRICAL CHARACTERISTICS/ 电气特性:

Rated Current I _n (A) 额定电流 I _n (A)	CONVENTIONAL TIME(H) 约定时间	CONVENTIONAL CURRENT 约定电流	
		CONVENTIONAL NON-FUSING CURRENT(A) 约定不熔断电流	CONVENTIONAL FUSING CURRENT(A) 约定熔断电流
10A ≤ I _n ≤ 12A	1h	1.5I _n	1.9I _n
16A ≤ I _n ≤ 63A	1h	1.25I _n	1.6I _n
80A ≤ I _n ≤ 160A	2h	1.25I _n	1.6I _n

Recommended fuse-base for NH000/NH00 fuses

See Model of product: NH00B


适用于 NH000/NH00 熔断体的支持件

详见产品型号: NH00B



NH00gG 500V/690V 平均 I-T 曲线图 (仅供参考)

AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

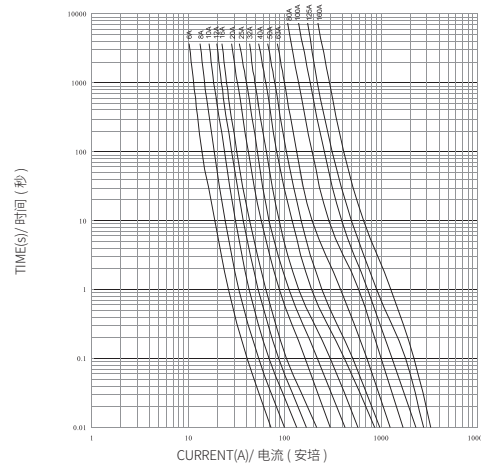

NH00gG 500V/690V~ 截断电流曲线图 (仅供参考)

CUT-OFF CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

