



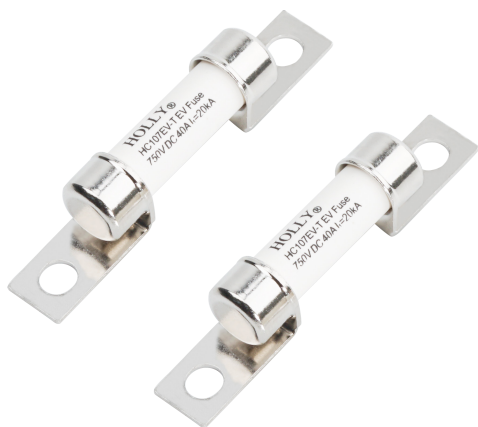


HC107EV-T 750V DC 10A-50A EV Fuse


Standard/ 标准: GB/T 31465.6
Applicable standard/ 环境可靠性适用标准: UL248-20, GB/T 31465.6, ISO 8820, JASO D622

INTERRUPTING CAPACITY / 分断能力:
20,000 amperes at 750V DC

Dimensions/ 尺寸: Unit 单位: mm

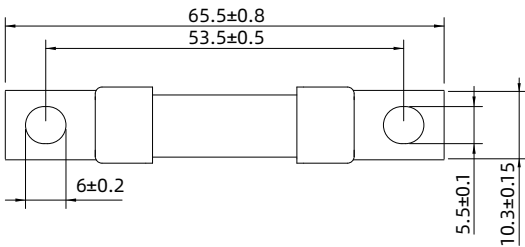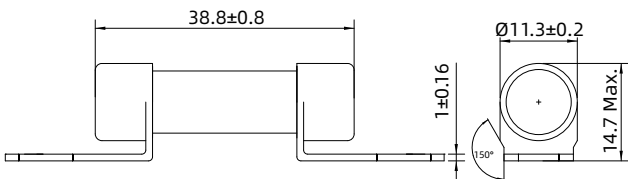

HC107EV-T 平均 I-T 曲线图 (仅供参考)
AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

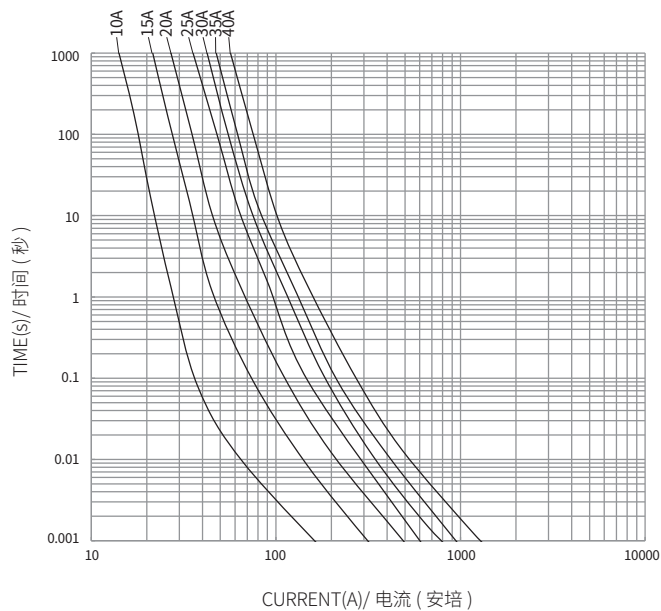

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证
HC107EV10T	10A	○
HC107EV15T	15A	○
HC107EV20T	20A	○
HC107EV25T	25A	○
HC107EV30T	30A	○
HC107EV35T	35A	○
HC107EV40T	40A	○
HC107EV50T	50A	○

● DENOTES FOR APPROVAL
○ DENOTES FOR PENDING

● 表示已取得安全认证
○ 表示正在申请安全认证