



6BF(P)&6BF-A



Φ6.35x32mm, RoHS Compliant & Pb-Free
CERAMIC TUBE FUSE (FAST-ACTING)
瓷保险丝管 (快熔断型)

INTERRUPTING CAPACITY / 分断能力:


10000A at 500V AC/DC

30000A at 500V AC/DC


Dimensions/ 尺寸:

Unit 单位: mm

6BF(P)

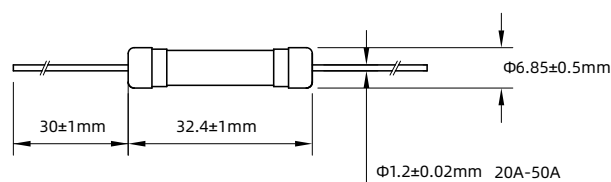


6BF-A

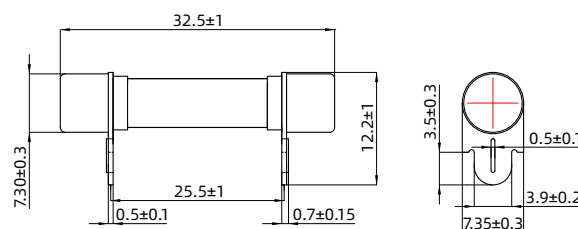

6BF RoHS Average I-T Characteristics Curve (FOR REFERENCE ONLY)

6BF RoHS 平均 I-T 曲线图 (仅供参考)

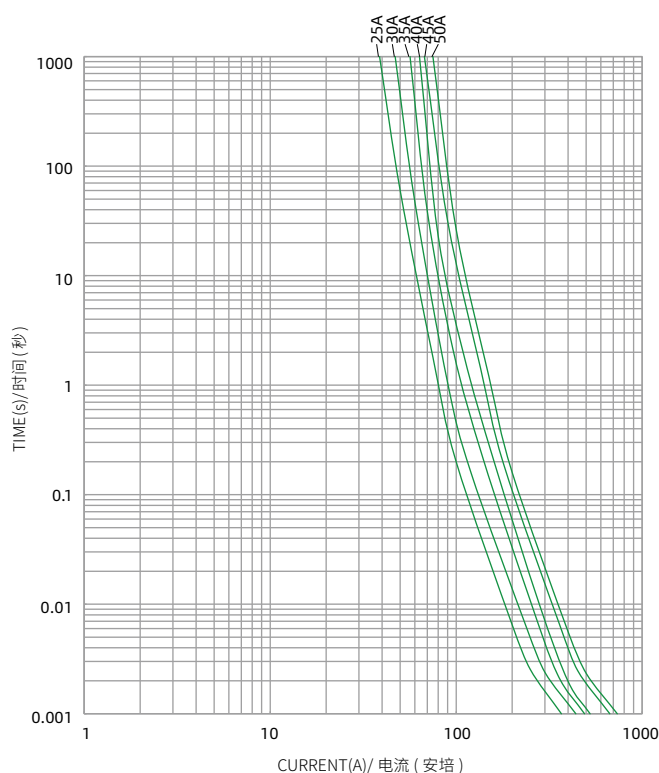

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证		I-T 参考值 REFERENCE (A ² .Sec.) (RoHS)
		cURus	TUV	
6BF(P)/6BF-A -200H	20A	●	●	/
6BF(P)/6BF-A -250H	25A	●	●	159.3
6BF(P)/6BF-A -300H	30A	●	●	215.1
6BF(P)/6BF-A -350H	35A	●	●	281.7
6BF(P)/6BF-A -400H	40A	●	●	315.2
6BF(P)/6BF-A -450H	45A	●	●	506.2
6BF(P)/6BF-A -500H	50A	●	●	585.2

● DENOTES FOR APPROVAL

○ DENOTES FOR PENDING

H DENOTES FOR 500V

● 表示已取得安全认证

○ 表示正在申请安全认证

H 表示 500V

ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hour Min.	最快 1 小时
200%	240 seconds Max.	最慢 240 秒
1000%	1 seconds Max.	最慢 1 秒

Standards/ 标准: UL248、IEC 60127